

Complete fittings

96220582 ORACLE 2C 250W HID 240V CL1 EFL
+ HST-MF 250W

E40	250W HST-MF	EN 60598	IK08	IP66			CE
-----	-------------	-------------	------	------	--	--	----

High performance street and road lighting in a timeless design

Oracle 2 is a road lighting lantern with IP66 optical and gear compartment, SC1 class, suitable for a wide range of different applications. Its light grey aluminium body, flat glass enclosure, and high quality materials ensure durability and recyclability.

The luminaire can be side entry (up to 60mm) and post-top (up to 76mm) mounted through an integral rotating spigot and it can be fixed with 2 screws and bolts to secure the initial position.

The optibloc system with Comfort concept for 250W HST/HIT lamp and equipped with a magnetic ballast delivers uniform lighting distribution precisely where it is needed according to the application and lighting standards (EN 13201).

Oracle resolves the major issue of the Energy resources and offers the perfect solution reducing the Energy costs:

Dimensions : 813 x 395 x 201 mm


Total power : 280 W

Weight: 14.26 kg


Windage:0,08m²



TLG_ORCL_F_15.jpg

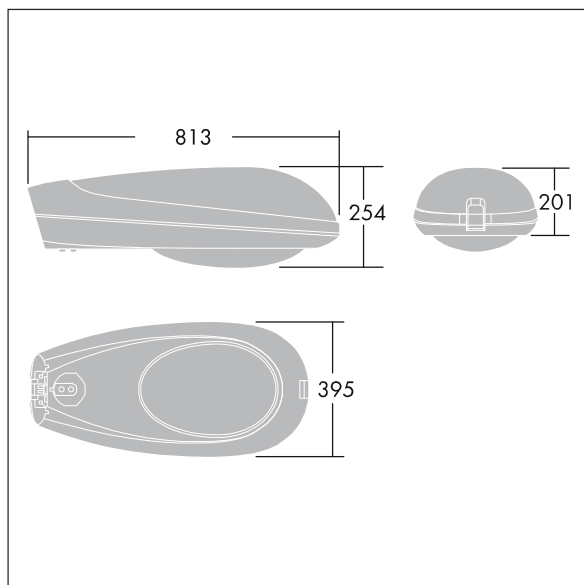

TLG_ORCL_M_LD2.wmf

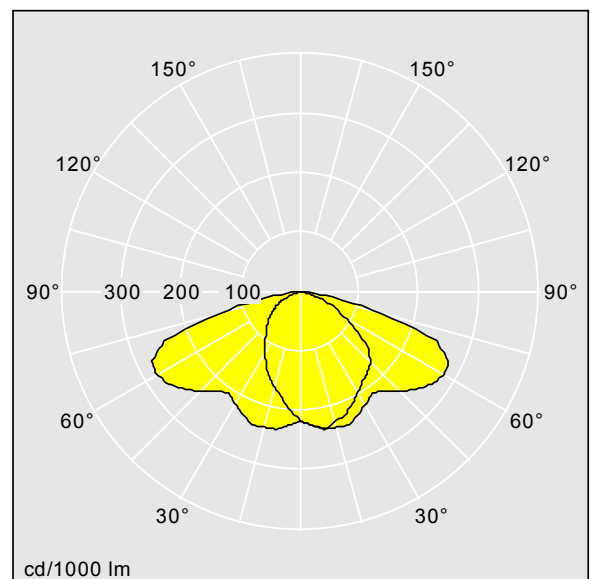

TLG_LA_OTD75C.ltd

Lamp position:V7L5

Lamp:HST-MF 250W

LOR: 0,73 ULOR: 0,00 DLOR: 0,73